

25 L 30 Lp+



228 –
284 kNm



8,3 –
10,1 m



3,4 –
3,6 m



3,5 –
5,1 m



2.620 –
2.810 kg



415°



38 kNm






235 –
285 bar




2 x
Minimum
90 l/min
~ 80 kW



Minimum
180 l/min
~ 90 kW


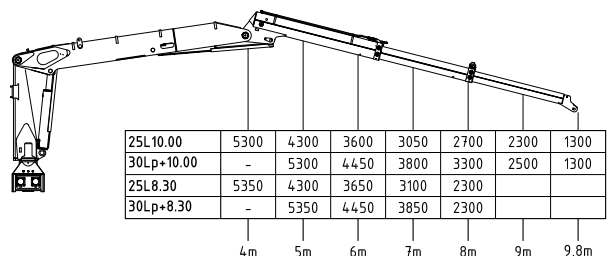
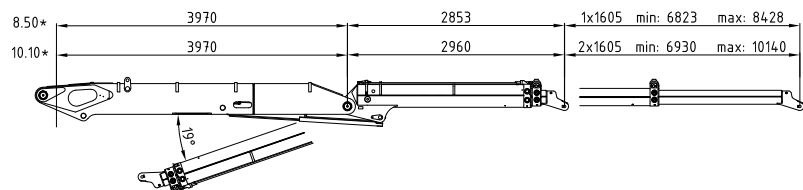
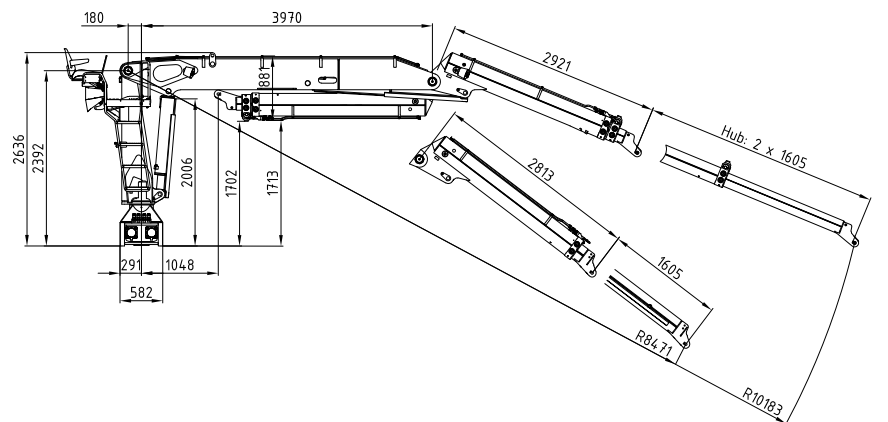


25L10.00	5300	4300	3600	3050	2700	2300	1300	[kg]
30Lp+10.00	-	5300	4450	3800	3300	2500	1300	[kg]
25L8.30	5350	4300	3650	3100	2300			[kg]
30Lp+8.30	-	5350	4450	3850	2300			[kg]

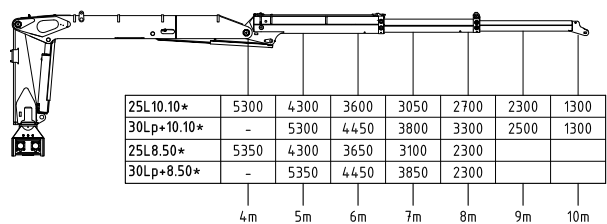


25L10.10*	5300	4300	3600	3050	2700	2300	1300	[kg]
30Lp+10.10*	-	5300	4450	3800	3300	2500	1300	[kg]
25L8.50*	5350	4300	3650	3100	2300			[kg]
30Lp+8.50*	-	5350	4450	3850	2300			[kg]


*gestreckt / stretched




Schwenkabstützung / slewing outrigger

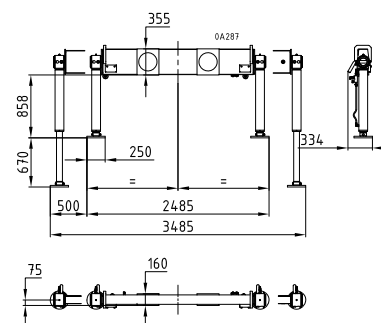



Vierkantabstützung / squared outrigger

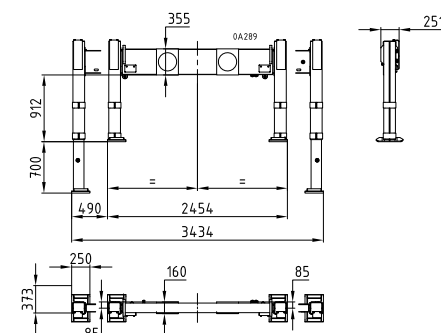


Schwenkabstützung breit / slewing outrigger wide

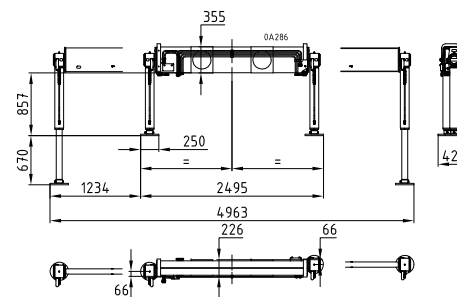


Vierkantabstützung breit / squared outrigger wide

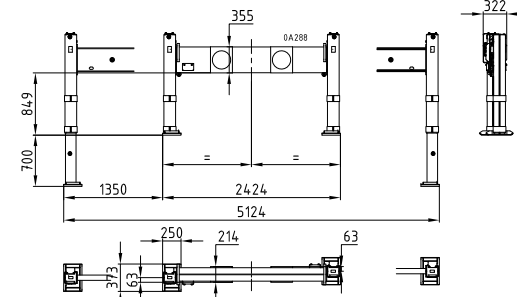

Rücksitz 01
Back seat 01



Rücksitz 04
Back seat 04

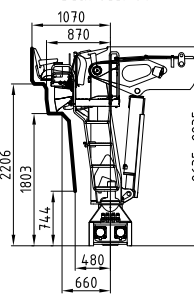

Seitensitz 04
Side seat 04

