

15LFR



132 –
151 kNm



8 –
10,4 m



3,5 –
3,9 m



3,8 –
5 m



2.205 –
2.490 kg



415°



25 kNm



260 –
300 bar



Minimum
80 l/min



Minimum
65 l/min




Minimum
170 l/min


~ 40 kW

~ 66 kW


~ 85 kW

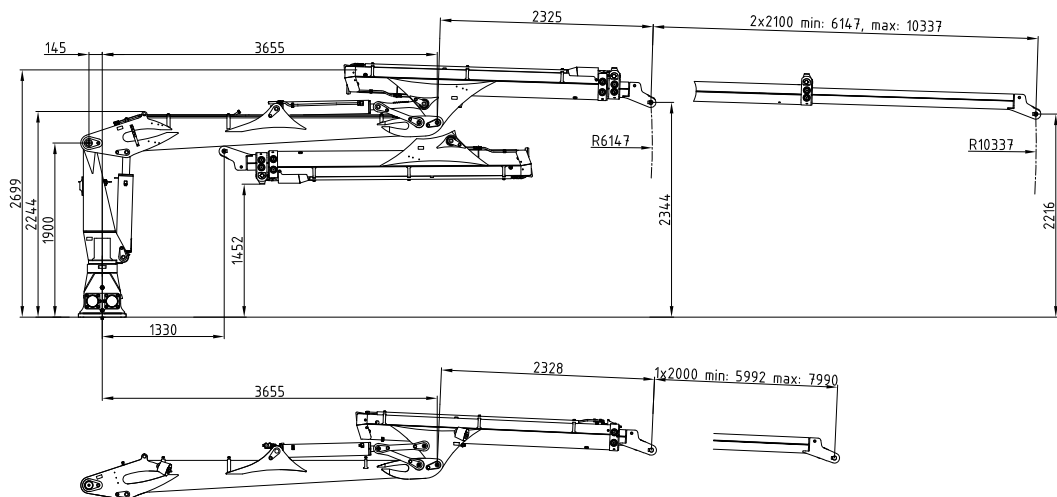



Kransockel stationär
Crane base stationary



Kransockel schmal
Crane base small




Kransockel breit
Crane base wide

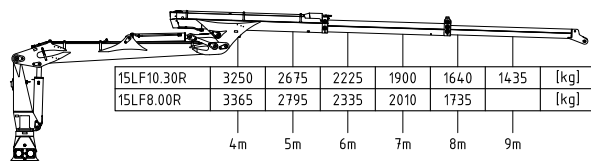


15LF10.30R	3250	2675	2225	1900	1640	1435	[kg]
15LF8.00R	3365	2795	2335	2010	1735		[kg]

170° Hochklappung
170° of lifting up

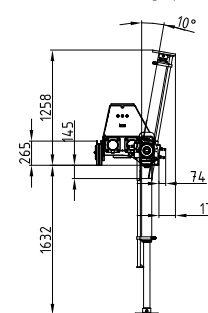


8.00






10.30




Sockel schmal
Crane base small

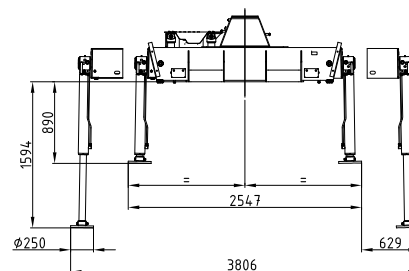

Sockel breit
Crane base wide

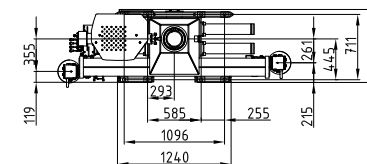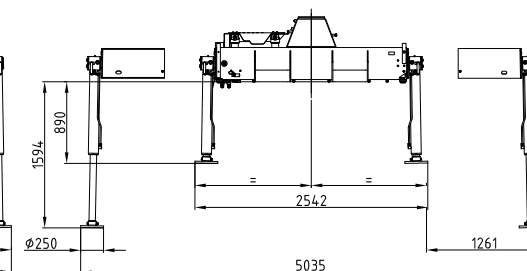

Rücksitz 04
Back seat 04

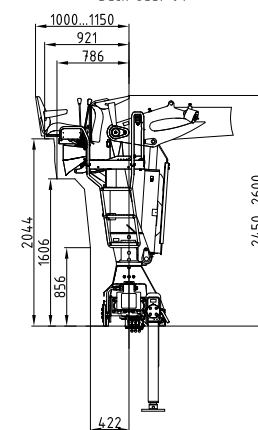

Seitensitz 04
Side seat 04

