

9LFR

74 kNm

10,3 m

3,68 m

3,8 - 5 m

2.270 kg

420°







20 kNm

215 bar


1x
Minimum
80 l/min
~ 31 kW

2x
Minimum
60 l/min
~ 47 kW


LS
Minimum
150 l/min
~ 60 kW

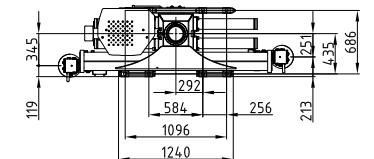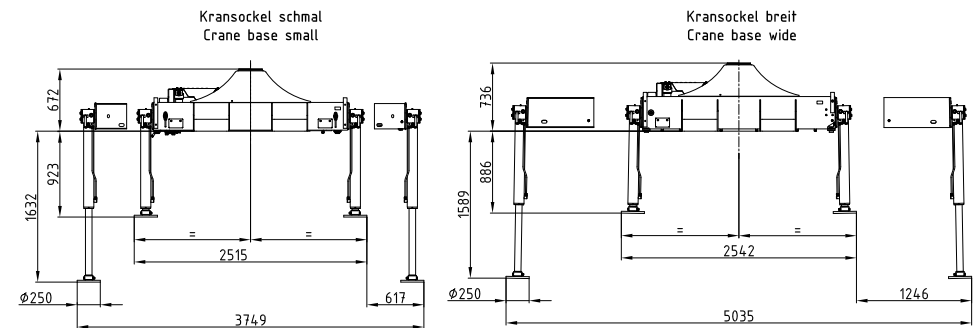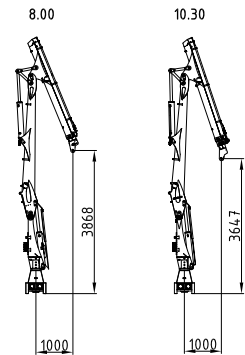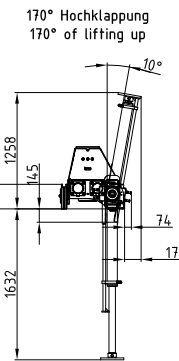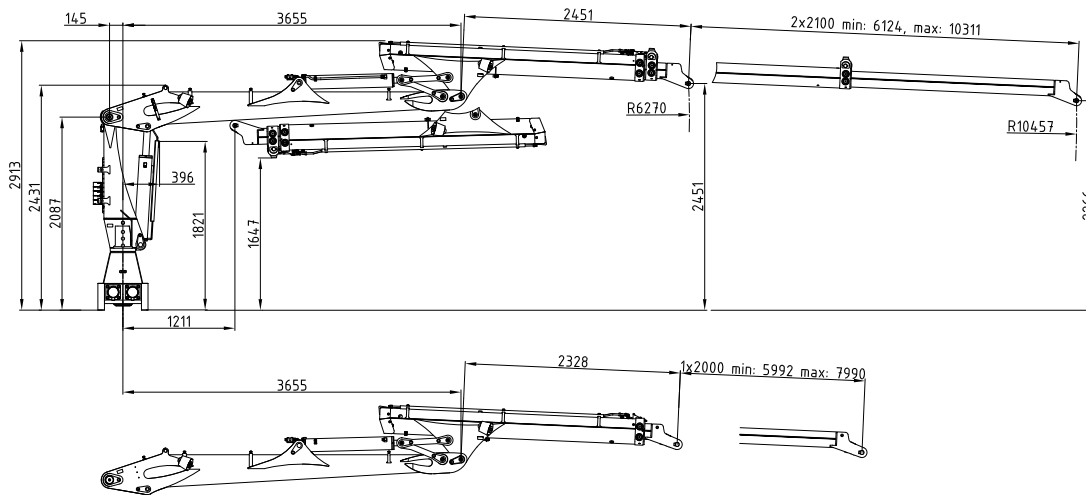



Kransockel stationär
Crane base stationary



Kransockel schmal
Crane base small




Kransockel breit
Crane base wide

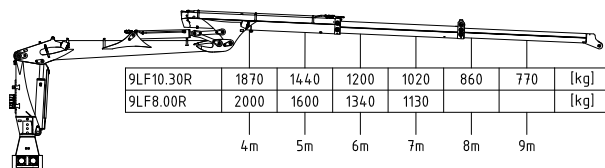

9LF10.30R	1870	1440	1200	1020	860	770	[kg]
9LF8.00R	2000	1600	1340	1130			[kg]

Rücksitz 04
Back seat 04

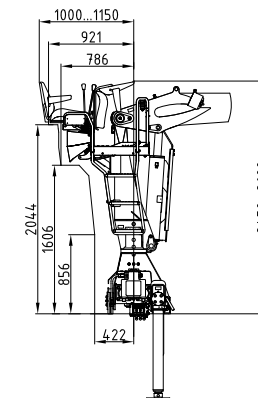

Seitensitz 04
Side seat 04

