

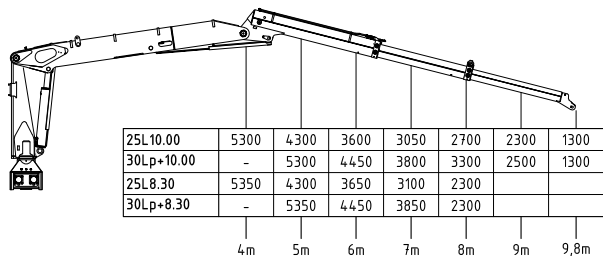
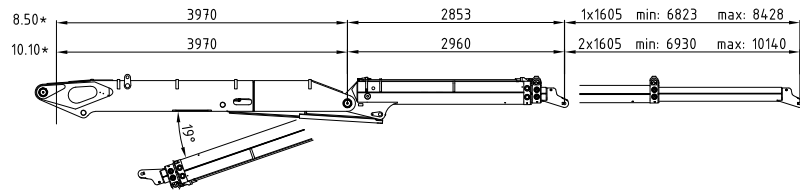
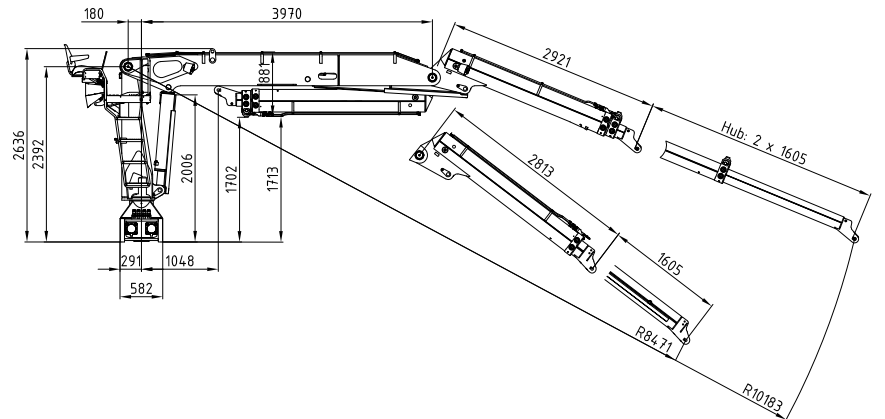


25LR 30Lp+R

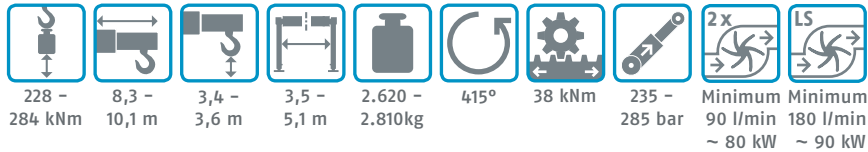


25L10.00	5300	4300	3600	3050	2700	2300	1300	[kg]
30Lp+10.00	-	5300	4450	3800	3300	2500	1300	[kg]
25L8.30	5350	4300	3650	3100	2300			[kg]
30Lp+8.30	-	5350	4450	3850	2300			[kg]

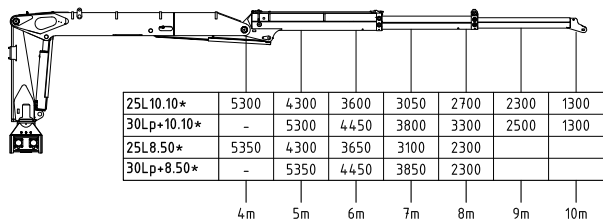


25L10.10*	5300	4300	3600	3050	2700	2300	1300	[kg]
30Lp+10.10*	-	5300	4450	3800	3300	2500	1300	[kg]
25L8.50*	5350	4300	3650	3100	2300			[kg]
30Lp+8.50*	-	5350	4450	3850	2300			[kg]


*gestreckt / stretched

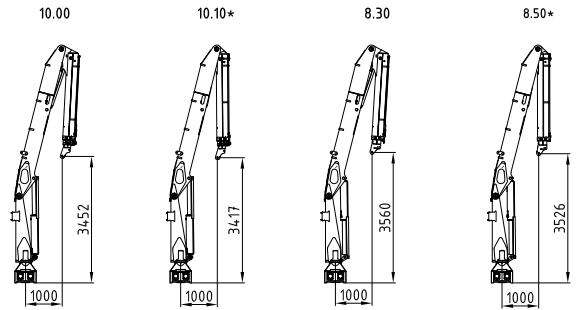


Schwenkabstützung / slewing outrigger

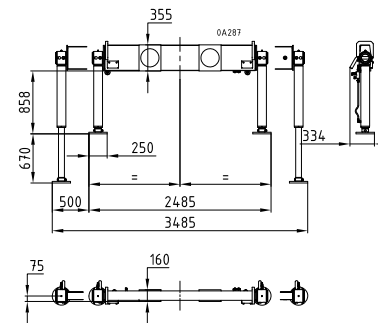


Vierkantabstützung / squared outrigger

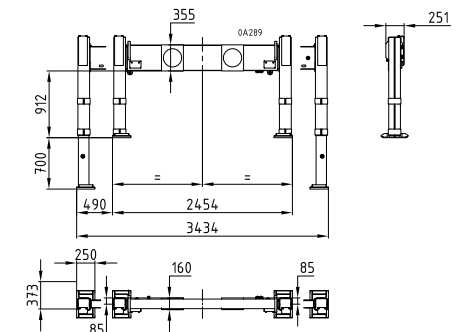


Schwenkabstützung breit / slewing outrigger wide

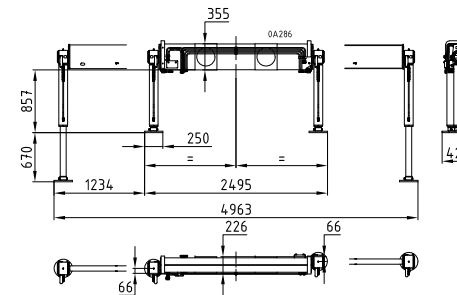


Vierkantabstützung breit / squared outrigger wide

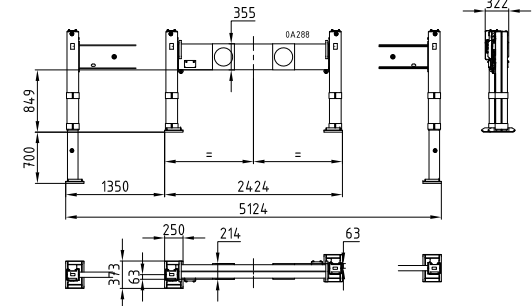



Rücksitz 01
Back seat 01



Rücksitz 04
Back seat 04



Seitensitz 04
Side seat 04



Hublasten netto ohne Lastaufnahmemittel / lifting capacities without equipment

Rev09 erstellt am / established on 13.07.2023 von / by DuH

Technische Änderungen vorbehalten / technical changes reserved